

# Packaging

## Blister Pack Machine



### SALIENT FEATURES:

- Less Change Over Time.
- Higher Output.
- Easy To Operate And Maintain.
- In Compliance With cGMP Standards.

### OPTIONAL FEATURES:

- Separate Punching And Perforation Station.
- Print Registration Control Facility.

### TECHNICAL SPECIFICATIONS:

Model	LPTBP-L-2000
PVC Base Film	MAX 218 mm
PVC Film thickness	0.25 mm
PVS Reel dia.	MAX 440 mm
Aluminium Foil width	MAX 241 mm
Aluminium foil thickness	0.02 MM/0.03 mm
Aluminium Reel dia.	MAX 220 mm
Total Forming Area	MAX 25 mm x 200 mm MAX 100 mm x 200 mm
Advance Length	100 mm
Pack Length Punched Out	200 mm
Pack width Punched out	100 mm
Forming Depth	16 mm
Output	MAX 300 Packs Per Min (Depends upon pack size and product dimensions)
Total Power Consumption	8 KVA without Air Compressor.

## Strip Packing Machine

### SALIENT FEATURES:


- Models ranging from 2 tracks to 10 tracks, 40mm to 300mm sealing width.
- Take off conveyors of different sizes to convey strips to inspection and packing table.
- Customised to different sizes and shapes.
- Machine suitable for different heat sealable packing laminates.
- Digital Temperature control.
- Electrical motor suitable for 415 V/ 380 V/ 3 PH/ 50 CS/ AC Supply.
- All contacts parts are SS316.
- PLC Control panel (Optional)
- In compliance with cGMP.

### TECHNICAL SPECIFICATION

Model LPTSP	2 Track	4 Track	6 Track	8 Track	10 Track
Capacity (TAB. Per Min.)	200-400	600-800	1000-1200	1600-1800	1800-2000
Heating Load kw	500w x 2	750w x 2	1000w x 2	1000w x 2	1000w x 2



## Automatic Double Disc Counting MC

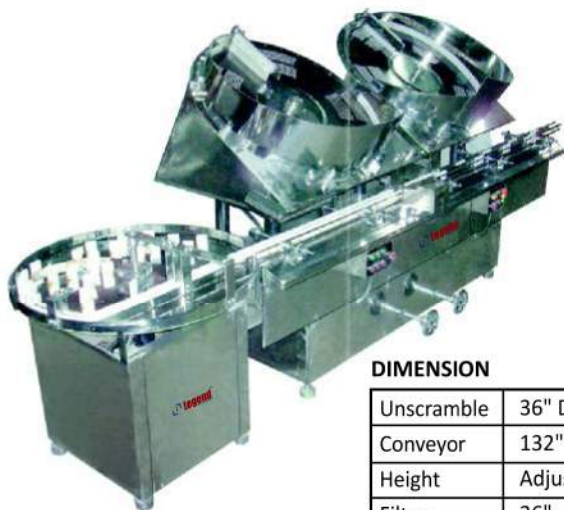

### SALIENT FEATURES:

- Up to six bottles can be automatically filled at a time through a twin 3 track filler.
- Up to 150 bottles per minute depending upon the number of counts per fill.
- In compliance with cGMP model.
- PLC control panel (optional).

### DIMENSION

Unscramble	36" DIA.
Conveyor	132"
Height	Adjustable between 30" to 36"
Filter	36"
Width	60"
Height	72"

### TECHNICAL SPECIFICATION

Tablet Size	Any Size
Capsule	0 to 5
Container Size	up to 6 inches
Power Required	3 Phase 440 V 1 Phase 220 V
Getting System	Single Phase 220 V
AC Solenoid Controlled by Limit Switch	

## Packing Conveyor Belt

### SALIENT FEATURES:

- Structure is made of S.S. 304 with matt finish.
- VFD control.
- Belt-alignment system for long life & straight running of belt.
- Direct gear drive.
- Adjustable height of conveyor belt, to align with other machine of the line.
- Self-alignment bearing for easy maintenance.
- Castor Wheel with lock (optional).
- Extra end table at end of conveyor.
- Special type adjustable angle at Initial of conveyor for strip or blister packing.



### TECHNICAL SPECIFICATION

Model	LPTCB
Direction of Movement	Left to Right
Speed	7.5 Mtr/Min. up to 12 feet long 12 Mtr./Min from 13 feet to 24 Feet Long
Power supply	0.25 HP/220 V/50 Hz up to 12 feet long 0.5 HP/220 V/50 Hz from 13 feet to 24 feet long
Height of Conveyor	860 mm to 910 mm
Belt width	9" or 12" as per requirement.
Belt Details	PVC, endless 2 ply sandwich, 2mm thickness.



## De-blister Machine

### SALIENT FEATURES :

- Suitable For Blister Packs (pvc/alu) Containing Tablets, Capsules, caplets, Tabsules, Dragees Etc.
- Portable.
- No Change Parts Required.
- All Contact Parts Are From S. S.
- Single Phase Operation.
- Ac Synchronous Motor drive.

### TECHNICAL SPECIFICATION

Model	DB-100
Total Power	240 V Single Phase AC 50 Hz (Compliance Offered For Supplies with other voltages and frequencies)